



Product Size	150g
Gross Weight	210g
Net Weight	152g
UN Number	1950
Custom Code	3403.19.00
Country of Manufacture	RSA
Barcode	6001690300214
Article Number	030021

CHARACTERISTICS	
Colour	Straw
Texture	Liquid
Odour	Mild oily solvent
Temp Range	130 - 330 °C

PACKAGING	
Type	Card Box
Dimensions	H:14.5 W:22 L:32.5cm
Box Weight	4kg
Packaging Group	Class II
Valve Type	360°
Cap	Translucent Blue
Pack Type	Aerosol
Units in Carton	24


### Product Description

#### ✔ DISPLACES MOISTURE ✔ STOPS RUST ✔ LUBRICATES ✔ CLEANS ✔ PROTECTS

Q20 MULTI-PURPOSE LUBRICANT is the leading multi-purpose lubricant that protects against corrosion, stops rust, lubricates sticky mechanisms and displaces moisture from electrical systems. Q20 MULTI-PURPOSE LUBRICANT is the ideal light duty lubricant for use in the home, garage and workshop.

Available in 150 g / 300 g / 5 lt / 25 lt / 1000 lt

### Ideal Usage

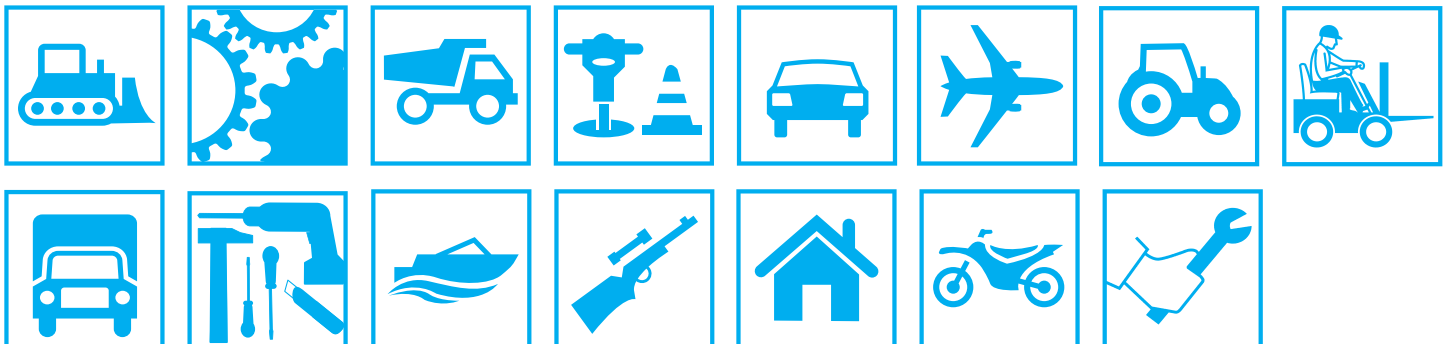

## Application of Product

### Directions:

Shake well before use. Q20 MULTI-PURPOSE LUBRICANT works best when the nozzle is pressed down firmly. Spray onto the surface to be treated and do not wipe off.

**Test Results/Approvals/Certificates****SABS Test:****TEST REPORT****SABS**

Enquiries:	F.Valoyi
Tel:	(012) 428-7094
Acceptance date	2010-05-12
Date:	2010-06-18
Report No:	2112/P4067/10/PT
Page:	1 of 2

Triton-Leo Group (Pty) Ltd  
**Attention: Wolly Wolozinsky**  
P O Box 459  
ISANDO  
1600

**1 SAMPLE DESCRIPTION**

7 x Samples marked Q20, Mr Mckenic 9 in 1, Spark IND, Wynn's No.5, Tool in a can, WD 40, Spark STD.

The samples were received in a condition suitable for testing

**2 SAMPLE SUBMITTED**

Sample received date:	2010/05/05
Test starting date:	2010/05/10
Test completion date:	2010/06/18

**3 TEST REQUESTED**

Flash Point (ASTM D93)  
Pour Point (ASTM D97)  
Kinematic Viscosity (ASTM D445)  
Weld Point (ASTM D2783)  
Weld Index (ASTM D2783)

**1 Dr Lategan Road Groenkloof, Private Bag X191 Pretoria 0001, Tel: +27 (012) 428-7911, Fax: +27 (012) 344-1568.**

This test was performed by SABS Commercial (Pty) Ltd.  
This report and the test results relate only to the specific sample(s) identified herein. They do not imply SABS approval of the quality and/or performance of the item(s) in question and the test results do not apply to any similar item that has not been tested.  
(Refer also to the complete conditions printed on the back of this page.)

**Test Results/Approvals/Certificates****Boeing Test:**

**SAA Technical (Proprietary) Limited**  
MR. A.J. Fouche  
Senior Inspector  
NDI Laboratory  
1<sup>st</sup> floor  
NDT Building  
TECHNICAL AREA  
Jones Road  
Kempton Park  
Private Bag X12  
OR Tambo International Airport  
1627  
Tel: 27 11 978-5307  
Fax: 27 11 978-8421  
Email: AlwynFouche@flysaa.com

14 March 2014

**Simon Smith**  
Q20

**Results of Q20 Batch : 01100290979**

A sample was received of the Q20 Super Multi-Purpose Lubricant, and tested As Per Boeing document D6-17487 and Airbus document AIMS 09-00-002. Product was used straight from the can.

The following results were obtained:

Sandwich corrosion	ASTM F1110	Passed
Immersion corrosion	ASTM F483	Passed
Acrylic Crazing	ASTM F484	Passed
Polycarbonate Crazing	Boeing Doc D6	Passed
Hydrogen Embrittlement	ASTMF519	Passed

The product is suitable for aircraft use.

Regards,

.....  
A.J. Fouche  
Senior Inspector NDI Laboratory

B Mpondo\*, MM Zwane (Chief Executive Officer), Y Kwinana\*, A Mabizela\*

\*Non-Executive Director

Company Secretary – Sandile Dlamini

SAA Technical SOC Ltd

STAR ALLIANCE 

Reg. No. 1999/024058/30

**Safety Data Sheet Summary****Classification of the substance or mixture**

**Classification under CLP:** Flammable Aerosol Category 1 – H222  
Aquatic Chronic Category 2 – H411  
For full wording of Hazard statements see Section 16

**Classification under DPD:** Flammable – R12, Carcinogen Category 3 – R40,  
Hazardous to the Environment – R51/53  
For full wording of Risk phrases see Section 16

**Label elements**

**Contains:** Perchloroethylene

**Signal words:** Danger



**Precautionary statements:** P102 Keep out of reach of children  
P270 Do not eat, drink or smoke when using this product  
P260 Do not breathe spray  
P273 Avoid release to the environment  
P280 Wear protective gloves / protective clothing  
P309+P313 If exposed or if you feel unwell: Get medical attention

**Special labelling for aerosols:** Pressurized container: protect from sunlight and do not expose to temperatures exceeding 50 °C. Do not pierce or burn, even after use. Do not spray on a naked flame or any incandescent material. Keep away from sources of ignition — No smoking. Keep out of the reach of children.